fabric O

fabric

Sewind

#4

Channel STOP Do not stitch STOP past this line

Side Seams

A. FOLD bag in half.


B. PIN side edges of sewing bag.

C. **STITCH** side seams on top of side stitches. NOTE: Do NOT stitch inside the channel.

Fold of fabric

#5


Preparing Cord

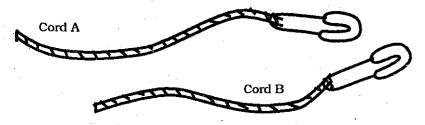

- A. **CUT** cord in two equal parts. We'll call one Cord A & the other Cord B.
- B. ATTACH a large safety pin to one end of each cord.

#6

Inserting Cord

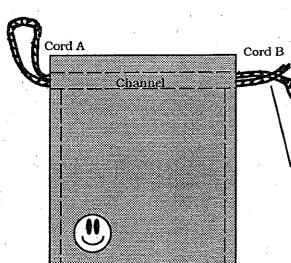


- A. **INSERT** safety pin with Cord A through one "Channel", continuing directly into the other "Channel".
- B. TIE the ends of Cord A together.
- C. **REPEAT** steps A & B by inserting cord B at the side of the bag opposite to cord A knot.

Fold of fabric

#7

Finishing Your Sewing Bag





- A. PRESS your Sewing Bag.
- B. **CONGRATULATIONS** in completing your Sewing Bag.
- C. COLOR picture to match your Sewing Bag.
- D. YOU are now ready to select another pattern from this Packet.


Sewing Bag



#1


Cutting Out

45" (115 cm) and 60" (150 cm) wide fabric



- A. FOLD fabric in half.
- B. **POSITION** paper pattern Straight of Grain FOLD LINE on fabric fold.
- C **INSERT** pins in each pin picture, pinning through paper pattern and fabric.
- D. CUT on lines showing scissors. Cut through both paper pattern and fabric. Do not cut on Straight of Grain FOLD LINE.
- E. **REMOVE** all pins from paper pattern and fabric. Thread your sewing machine. You are ready to start sewing.

#2

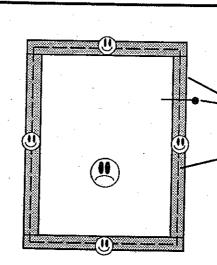


Raw Edges

A. TURN all raw edges 5/8 inch (1.5 cm) to ugly side of fabric and pin.

B. STITCH around all four edges. Remove pins as you sew. NOTE: Pivot at each corner.

#3

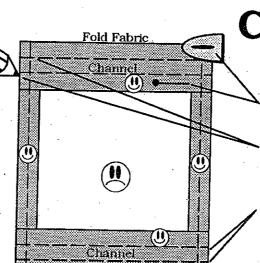

Fold Fabric

Chalk Talk Lines

A. TURN each short edge 3 inches (7.5 cm) to ugly side of fabric and pin, then press.

B. "CHALK TALK" two lines 1 1/4 inches wide (3.2 cm) in the center of each folded edge. NOTE: This is called a "Channel".

C. STITCH on all four "Chalk Talk" lines

14

15